


"For your order of special dimensions, technical drawing can be used."

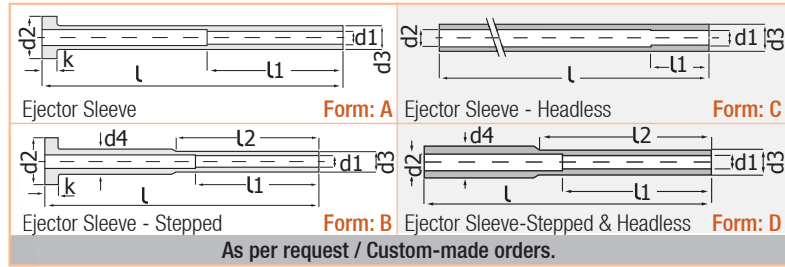


### Ejector Sleeve - Nitrided / DIN ISO 8405

Code: **SMB**

Rear part of inner hole is ground in 30 - 45 mm Ejector Pin working tolerance.

**Material:** 1.2343  
**Head Hardness:** 45 ± 2 HRC  
**Body Hardness:** 60 ± 2 HRC  
**Heat Resistance:** 500 - 550° max.  
**Tensile Resistance:** 1450 N / mm<sup>2</sup>

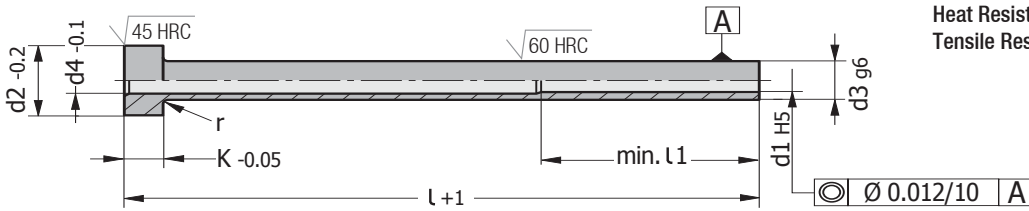

d3	l	d1	l1	d4	d2	k	r
<b>4</b>	75	2.0	35	2.3	8	3	0.3
	100						
	125						
	150						
	160						
	175						
	200						
	250						
<b>5</b>	75	2.5	35	3.0	10	3	0.3
	100						
	125						
	150						
	160						
	250						
<b>5</b>	75	3.0	45	3.3	10	3	0.3
	100						
	125						
	150						
	160						
	175						
	200						
	250						
300							

d3	l	d1	l1	d4	d2	k	r
<b>6</b>	75	3.5	45	4.0	12	5	0.5
	100						
	125						
	150						
	160						
	175						
	200						
	250						
<b>6</b>	75	4.0	45	4.3	12	5	0.5
	100						
	125						
	150						
	160						
	175						
	200						
	250						
	300						
	350						
	400						
	450						
500							

d3	l	d1	l1	d4	d2	k	r
<b>8</b>	75	5.0	45	5.3	14	5	0.5
	100						
	125						
	150						
	160						
	175						
	200						
	250						
	300						
	350						
<b>10</b>	75	6	45	6.3	16	5	0.5
	100						
	125						
	150						
	160						
	175						
	200						
	250						
	300						
	350						
<b>12</b>	75	8	45	8.3	20	7	0.8
	100						
	125						
	150						
	160						
	175						
	175						

d3	l	d1	l1	d4	d2	k	r
<b>12</b>	200	8	45	8.3	20	7	0.8
	250						
	300						
	350						
	400						
	450						
<b>14</b>	75	10	50	10.3	22	7	0.8
	100						
	125						
	150						
	160						
	175						
<b>16</b>	200	12	50	12.3	22	7	0.8
	250						
	300						
	350						
	400						
	450						
	500						
	500						
	500						
	500						



Order:  
**SMB.** d1 x d3 x l