


Important
Max. Operation Length

Standard Lifter


Code: PS

Compact unit for the release of small undercuts. The unit is completely pre adjusted and easy to install. The space required for installation is reduced due to the vertical movement perpendicular to the ejector plates. Minimum space required for installation, only needs the space of an ejector. Mechanical solution. No milling, grinding or hardening other than the machining of detail needed.

Material: INOX 1.4034 **Hardness:** 48 ± 2 HRC **Patented System**

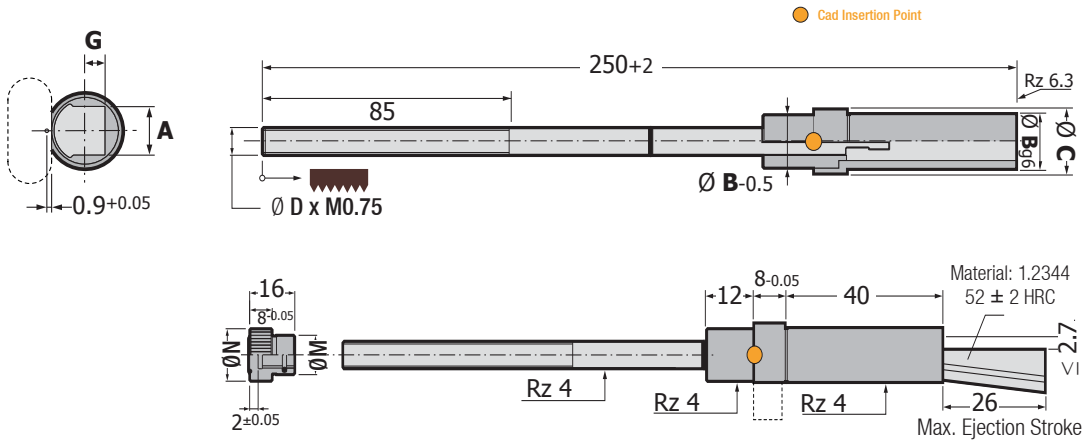

Order Code	A	B	C	D	G	M	N	R
PS.062250	6.2	10	12	6	3.4	12	16	1.25
PS.082250	8.2	12	14	6	4	12	16	1.25
PS.102250	10.2	14	16	8	4.2	14	18	2
PS.122250	12.2	16	18	8	4.2	14	18	2

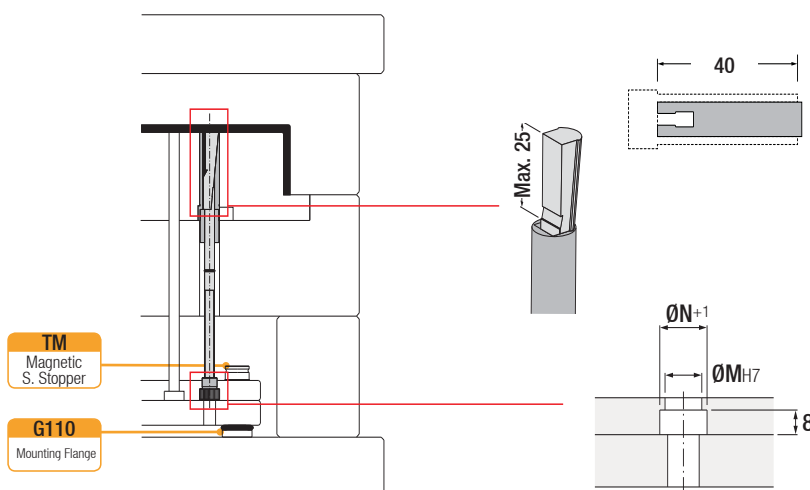

* The bushing can be machined to make the molding surface up to 25mm (0.98").

How much can be cut from the top on the bushing and RP in Z axis?

PS.062250: 8 mm (0.315")
 PS.082250: 15 mm (0.591")
 PS.102250: 15 mm (0.591")
 PS.122250: 20 mm (0.787")