








Y Series, Gas Spring - Space Saving

It may be connected to hose systems (after Y.500) and used in different measurements for space saving in SN / ISO series. Do not be confused about recommended maximum cycle/minute specified in diagrams for a certain type of product group and maximum speed. The force curves are especially related to stroke (20°C). So, the decrease in the gas volume and other factors are not taken into consideration. The wide connections and accessories for all kinds of applications are recommended when these standard series connection supply tanks are used. In gas spring selection, a spring over the criteria must be selected. The usage criteria should be adjusted by assuming that the processed sheet metal quality may change.

Max. Pressure: **150 Bar** - Max. Speed : **1.6 m/s** - Max. Temp. : **0-80°C**

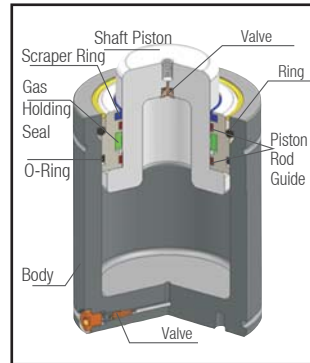

Y Series, Gas Spring - Space Saving

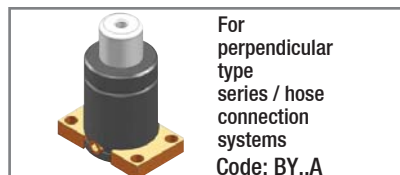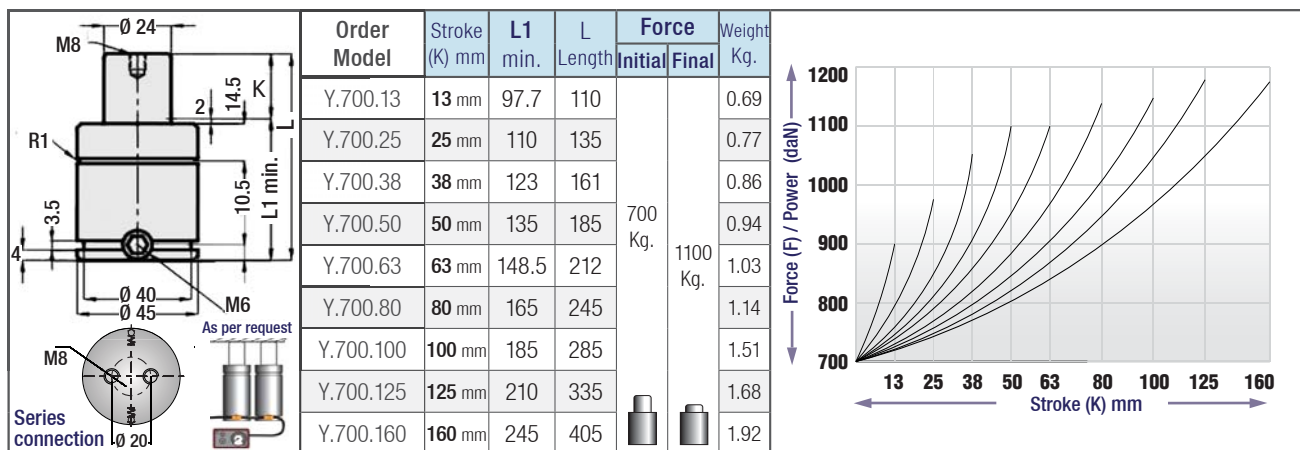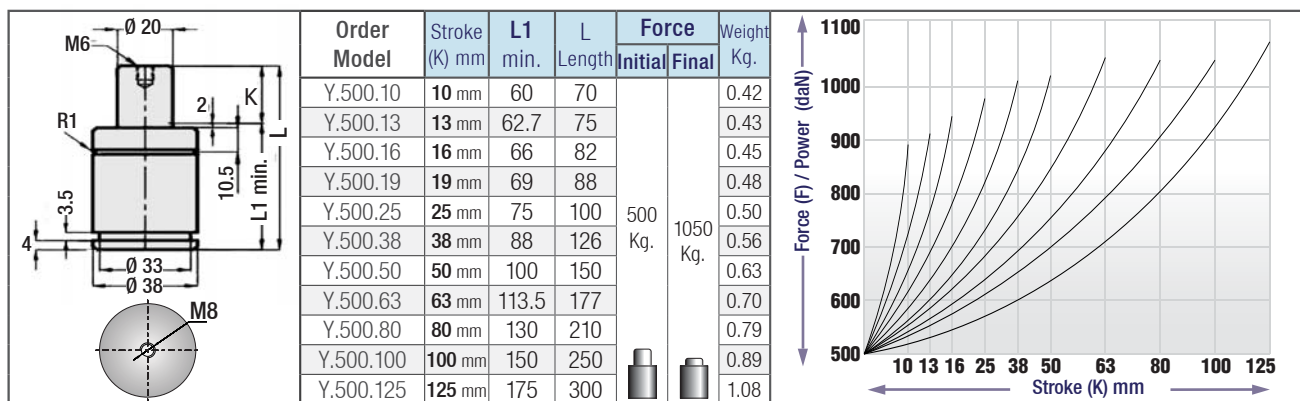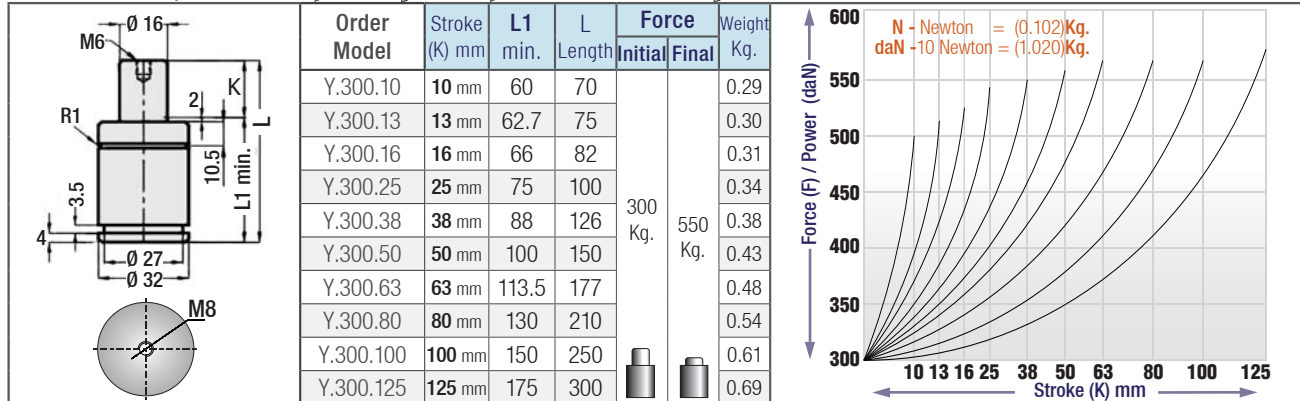

Y Series, Gas Spring - Space Saving

