

Kullanıcı tarafından açılabilir
(merkeziye bilgisidir).




Metal Enjeksiyon Yolluk Memesi

Kod: MEY

Yüksek ısıya dirençli / Sıcak iş çeliği / Kalıp yolluklar için


d2	l	d1	D	l1	l2
12	55	6.2	20	35	20
	65			45	
	75			55	
12	55	6.2	28	30	25
	65			40	
	75			50	
	85			60	
	95			70	
	105			80	
14	55	6.5	28	30	25
	65			40	
	75			50	
	85			60	
	95			70	
	105			80	
	115			90	

d2	l	d1	D	l1	l2
16	55	6.5	28	30	25
	65			40	
	75			50	
	85			60	
	95			70	
	115			90	
18	55	6.5	28	30	25
	65			40	
	75			50	
	85			60	
	95			70	
	115			90	
20	55	9.0	28	30	25
	65			40	
	75			50	
	85			60	
	95			70	
	105			80	
	115			90	

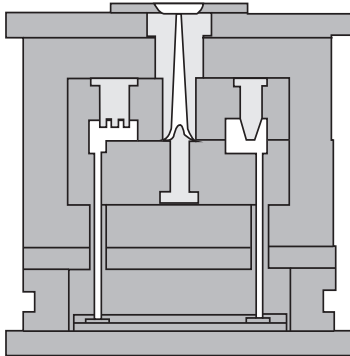

Özel Ölçüleri
Talepleriniz
İçin Teknik
Resim
Kullanılabilir.

İsteklerinize uygun "Özel Üretim" yapılır.

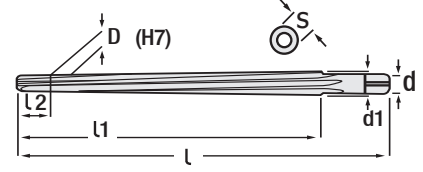

1:50 Konik, Pim Raybası



HSS (el raybası) Konik = 1:50

Sipariş: KPR. D x l

Kod:
KPR

DIN 9

D	d1	d	l	l1	S
3	4.06	4	80	58	3.15
4	5.26	5	93	68	4
5	6.36	6.3	100	73	5
6	8	8	135	105	6.3
8	10.8	10	180	145	8
10	13.4	12.5	215	175	10
12	16	14	255	210	11.2
14	18				
16	20.4	18	280	230	14

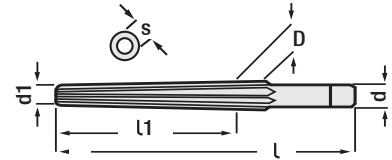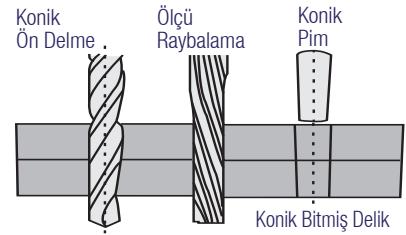

1:10 Konik, Yolluk Raybası

HSS (el raybası) Konik = 1:10

Sipariş: KYR. d1 x D x l

Kod:
KYR

d1	D	d	l	l1	S
4	10	10	100	70	8
9	16	12.5	120	80	10
14	24	20	160	110	16
20	32	25	200	140	20

Sipariş:
MEY. d2 x l x D

Max. Isı
Dayanımı: 500°C

Malzeme: 1.2344
Sertlik: 48-50 HRC