

Guide Bush, Headed - NAAMS

Code: **G41**

Self-Lubricating



Heat Resistance: < 150°C

Guide Bush with Collar - NAAMS

Code: **G40**

Self-Lubricating

Heat Resistance: < 150°C

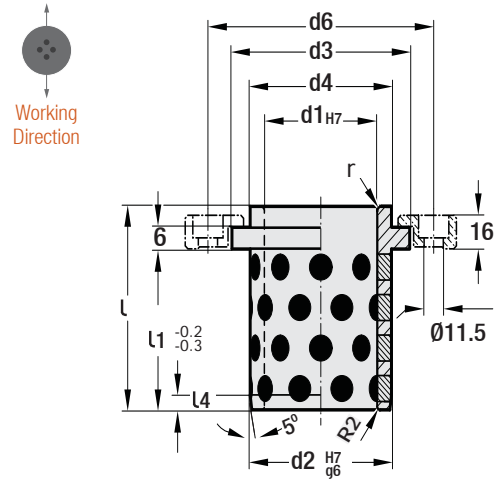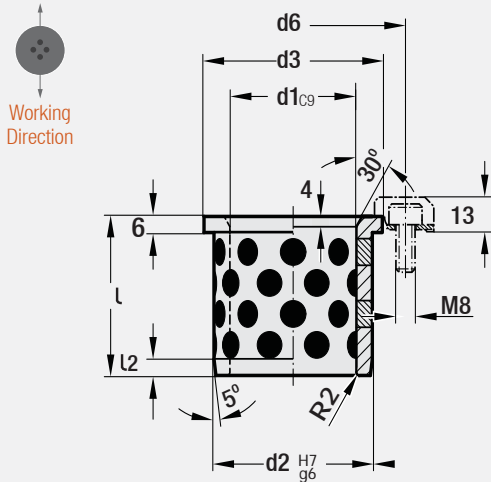


d1	l	d2	d3	d6	l2
25	40	32	40	57.4	4
32	50	40	50	67.4	4
40	55	50	63	80.4	5
50	63	63	71	88.4	6
63	75	80	90	107.4	8
80	90	100	112	129.4	10
100	115	125	140	157.4	12
125	138	160	180	197.4	12

d1	l	d2	d3	d4	d6	l1	l4	r
20	40	28	34	28	51.4	30	3	3
25	40	32	40	32	57.4	30	4	3
30	50	40	50	40	67.4	40	4	3
32	50	40	50	40	67.4	40	4	3
40	63	50	63	50	80.4	50	5	3
50	71	63	71	63	88.4	56	6	5
63	80	80	90	80	107.4	63	8	6
80	100	100	112	100	129.4	80	10	8
100	125	125	140	125	157.4	106	12	10
125	160	160	180	160	197.4	132	12	12

Clamping Detail

Code: **G101**

Form - A



Order: **G41**. d1 x l

IMPORTANT!


Self-lubricating components should be lubricated once in order to activate permanent lubricating at the first use.



Lithium Grease - 1kg.

Order Code: W150206


Material: Bronze + graphite inserts

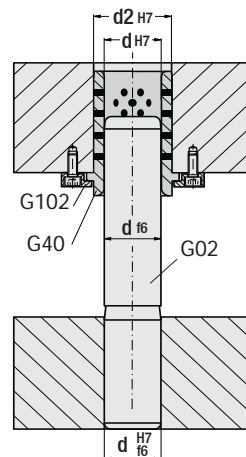

Clamping Detail

Code: **G101**

Form - A



Order: **G40**. d1 x l

Material: Bronze + graphite inserts