

Multi-Tip Hot Runner Nozzle

Economic Model

Nozzle with insert tip which is the last / new R & D work.






Heaters and insert tips of Multi-Tip Hot Runner Nozzle are easily replaced. An external thermocouple is available in nozzle body for precise temperature measurement.

How to order:

RMM (code) X **d** (nozzle Ø) X **l** (nozzle length) X **KX** (insert tip qty)

Important:

Multi-Tip Hot Runner Nozzles are not suitable for all types of materials and grammage. When selecting, please ask technical help from Guvenal - Hot Runner Department. Precise adjustments are necessary for mounting and operation. Wattage of heater depends on the flow characteristics of the material.

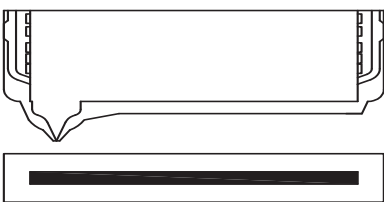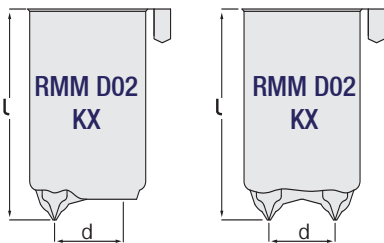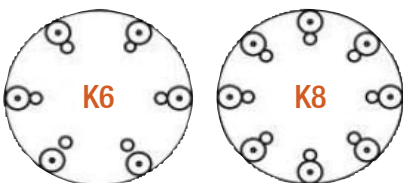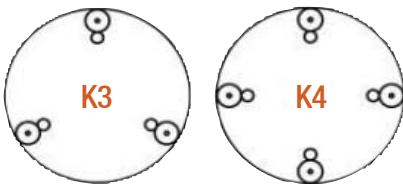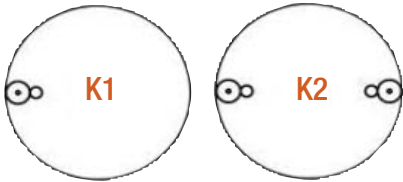

Please create your orders with form on page - 336

Order Code	d	l	D02 - KX	Heaters Wattage
RMM..	16	46	K1 - K2 - K3 - K4	290 - 350 - 400
		56	K1 - K2 - K3 - K4	290 - 350 - 400
		66	K1 - K2 - K3 - K4	470 - 620 - 690
		76	K1 - K2 - K3 - K4	620 - 690 - 850
		86	K1 - K2 - K3 - K4	690 - 850 - 950
		96	K1 - K2 - K3 - K4	690 - 850 - 950
	22	46	K1 - K2 - K3 - K4	350 - 400 - 470
		56	K1 - K2 - K3 - K4	470 - 620 - 690
		66	K1 - K2 - K3 - K4	620 - 690 - 850
		76	K1 - K2 - K3 - K4	690 - 850 - 950
		86	K1 - K2 - K3 - K4	690 - 850 - 950 - 1100
		96	K1 - K2 - K3 - K4	850 - 950 - 1100
28	46	K1 - K2 - K3 - K4 - K6	350 - 400 - 470	
	56	K1 - K2 - K3 - K4 - K6	470 - 620 - 690	
	66	K1 - K2 - K3 - K4 - K6	620 - 690 - 850	
	76	K1 - K2 - K3 - K4 - K6	690 - 850 - 950	
	86	K1 - K2 - K3 - K4 - K6	850 - 950 - 1100	
	96	K1 - K2 - K3 - K4 - K6	950 - 1100	
34	46	K1 - K2 - K3 - K4 - K6 - K8	400 - 470 - 620	
	56	K1 - K2 - K3 - K4 - K6 - K8	620 - 690 - 850	
	66	K1 - K2 - K3 - K4 - K6 - K8	690 - 850 - 950	
	76	K1 - K2 - K3 - K4 - K6 - K8	690 - 850 - 950 - 1100	
	86	K1 - K2 - K3 - K4 - K6 - K8	850 - 950 - 1100	
	96	K1 - K2 - K3 - K4 - K6 - K8	950 - 1100	