

d1	l	d2	k
9.0	100	11	1.0
	125		
	160		
	200		
	250		
9.5	100	12	1.0
	125		
	160		
	200		
	250		
10	100	12	1.0
	125		
	160		
	200		
	250		
	315		
10.5	100	13	1.0
	125		
	160		
	200		
11	100	13	1.0
	125		
	160		
	200		
	250		
12	100	14	1.0
	125		
	160		
	200		
	315		
13	100	15	1.0
	125		
	160		
	250		
14	100	16	1.5
	125		
	160		
	200		
	315		
16	100	18	1.5
	125		
	160		
	200		
	315		


d1	l	d2	k
5.4	100	6.5	0.5
	125		
	160		
5.5	100	7.0	0.5
	125		
	160		
	200		
	250		
5.6	100	7.0	0.5
	125		
	160		
5.7	100	7.0	0.5
	125		
	160		
5.8	100	7.0	0.5
	125		
	160		
5.9	100	7.0	0.5
	125		
	160		
6.0	100	8.0	0.5
	125		
	160		
	200		
	315		
6.5	100	9.0	1.0
	125		
	200		
	250		
7.0	100	9.0	1.0
	125		
	160		
	200		
	315		
7.5	100	10	1.0
	125		
	160		
	250		
8.0	100	10	1.0
	125		
	160		
	200		
	315		
8.5	100	11	1.0
	125		
	160		
	200		
	315		

d1	l	d2	k
3.9	100	5.0	0.5
	125		
	160		
4.0	100	5.5	0.5
	125		
	160		
	200		
	315		
4.1	100	5.5	0.5
	125		
	160		
4.2	100	5.5	0.5
	125		
	160		
4.3	100	5.5	0.5
	125		
	160		
4.4	100	5.5	0.5
	125		
	160		
4.5	100	6.0	0.5
	125		
	160		
	200		
	315		
4.6	100	6.0	0.5
	125		
	160		
4.7	100	6.0	0.5
	125		
4.8	100	6.0	0.5
	125		
4.9	100	6.0	0.5
	125		
5.0	100	6.5	0.5
	125		
	160		
	200		
	315		
5.1	100	6.5	0.5
	125		
5.2	100	6.5	0.5
	125		
5.3	100	6.5	0.5
	125		



**Ejector Pin - Conical Head / DIN 1530-D** Code: **HBI**

Material: 1.2516 WS Heat Resistance: 220° max.  
 Head Hardness: 45 ± 2 HRC Tensile Resistance: 1300 N / mm<sup>2</sup>  
 Body Hardness: 60 ± 2 HRC

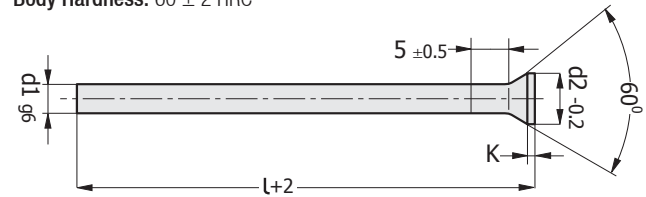

d1	l	d2	k
2.9	100	4.0	0.5
	125		
	160		
3.0	100	4.5	0.5
	125		
	160		
	200		
	315		
3.1	100	4.5	0.5
	125		
	160		
3.2	100	4.5	0.5
	125		
	200		
3.3	100	4.5	0.5
	125		
3.4	100	4.5	0.5
	125		
	160		
3.5	100	5.0	0.5
	125		
	160		
	200		
	315		
3.6	100	5.0	0.5
	125		
	160		
3.7	100	5.0	0.5
	125		
	160		
3.8	100	5.0	0.5
	125		

d1	l	d2	k
2.0	100	3.0	0.5
	125		
	160		
	200		
2.1	100	3.2	0.5
	125		
2.2	100	3.2	0.5
	125		
2.3	100	3.5	0.5
	125		
2.4	100	3.5	0.5
	125		
	160		
2.5	100	3.5	0.5
	125		
	160		
	200		
	315		
2.6	100	4.0	0.5
	125		
2.7	100	4.0	0.5
	125		
2.8	100	4.0	0.5
	125		
	160		

d1	l	d2	k
1.0	100	1.8	0.5
	125		
	160		
	200		
1.1	100	1.8	0.5
	125		
1.2	100	2.0	0.5
	125		
1.3	100	2.0	0.5
	125		
1.4	100	2.2	0.5
	125		
	160		
1.5	100	2.2	0.5
	125		
	200		
	250		
1.6	100	2.5	0.5
	125		
1.7	100	2.5	0.5
	125		
	160		
1.8	100	2.8	0.5
	125		
	160		
1.9	100	2.8	0.5
	125		



Order: **HBI**. d1 x l