


AD Series, Gas Spring - Low Profile

With its compact series features, requirement of protection from liquids, high stroke forces. 30% maximum pressure increase compared to the "Y Series" having similar sizes. Two layers of permanent lubrication. Ideal product for forming / shaping dies. It can be connected to the hose systems. Wide range of connection / fixing elements and accessories for all kinds of application. This standard series connection is recommended when supply tanks are used. In gas spring selection, a spring over the criteria must be selected. The usage criteria should be adjusted by assuming that the processed sheet metal quality may change. Do not repair the worn springs. The worn springs should be replaced.

Max. Pressure: 150 Bar - Max. Speed : 0.5 m/s - Max. Temp. : 0-80°C

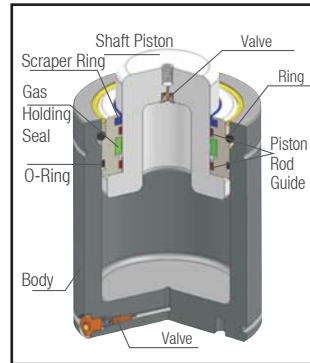

AD Series, Gas Spring - Low Profile

