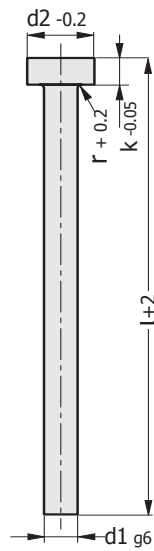


d1	L mm		d2	k
<b>1</b>	100	200	2.5	1.2
	125	250		
	160	315		
<b>1.1</b>	100		2.5	1.2
<b>1.2</b>	100		2.5	1.2
	160			
<b>1.3</b>	100		3	1.5
	160			
<b>1.4</b>	100		3	1.5
	160			
<b>1.5</b>	100	200	3	1.5
	125	250		
	160	315		
<b>1.6</b>	100		3	1.5
	160			
<b>1.7</b>	100		3	1.5
	160			
<b>1.8</b>	100		3	1.5
	160			
<b>1.9</b>	100		3	1.5
	160			
<b>2</b>	100	250	4	2
	125	315		
	160	400		
	200	500		
<b>2.2</b>	100		4	2
	160			
<b>2.3</b>	100		4	2
<b>2.4</b>	100		5	2
	160			
<b>2.5</b>	100	250	5	2
	125	315		
	160	400		
	200	500		
<b>2.7</b>	100		5	2
	160			
<b>3</b>	100	315	6	3
	125	400		
	160	500		
	200	630		
	250			

d1	L mm		d2	k
<b>3.2</b>	100		6	3
	160			
	200			
<b>3.5</b>	100	250	7	3
	125	315		
	160	400		
	200	500		
<b>3.7</b>	100		7	3
	160			
<b>4</b>	100	400	8	3
	125	500		
	160	630		
	200	800		
	250	1000		
	315			
<b>4.1</b>	100		8	3
<b>4.2</b>	100		8	3
	160			
<b>4.5</b>	100	250	8	3
	125	315		
	160	400		
	200	500		
<b>5</b>	100	400	10	3
	125	500		
	160	630		
	200	800		
	250	1000		
<b>5.2</b>	100	315	10	3
	200	400		
	250			
<b>5.5</b>	100	250	10	3
	125	315		
	160	400		
	200	500		
<b>6</b>	100	400	12	5
	125	500		
	160	630		
	200	800		
	250	1000		
	315			

Code: **SBIAH**
**DIN 1530**  
**ISO 6751**  
**Form: AH**

d1 ~	r
1.5 ~ 2	0.2
2.5 ~ 5.5	0.3
6 ~ 11	0.5
12 ~ 18	0.8
20 ~ 25	1

### Ejector Pin - Cylinder Head / ISO 6751, DIN 1530 Form: AH


**Order:**  
**SBIAH. d1 x L**
**Material:** 1.2516 WS  
**Hardness:** 60 ± 2 HRC

**Heat Resistance:** 220<sup>0</sup> max.  
**Tensile Resistance:** 1300 N/mm<sup>2</sup>

d1	L mm		d2	k
<b>6.2</b>	100		12	5
	160			
	250			
<b>6.5</b>	100	315	12	5
	125	400		
	160	500		
	200	630		
	250			
<b>7</b>	100	315	12	5
	125	400		
	160	500		
	200	1000		
	250			
	250			
<b>7.5</b>	100	250	12	5
	125	315		
	160	400		
	200			
<b>8</b>	100	400	14	5
	125	500		
	160	630		
	200	800		
	250	1000		
	315			
<b>8.2</b>	100		14	5
	160			
	250			

d1	L mm		d2	k
<b>8.5</b>	100	315	14	5
	125	400		
	160	500		
	200	630		
	250			
<b>9</b>	100	315	14	5
	125	400		
	160	500		
	200	630		
	250			
	250			
<b>10</b>	100	400	16	5
	125	500		
	160	630		
	200	800		
	250	1000		
	250			
	315			
<b>10.2</b>	125		16	5
	250			
<b>10.5</b>	100	200	16	5
	125	315		
	160	400		
<b>11</b>	100	250	16	5
	125	315		
	160	400		
	200			
	200			
<b>12</b>	100	400	18	7
	125	500		
	160	630		
	200	800		
	250	1000		
	315			

d1	L mm		d2	k
<b>13</b>	100	250	20	7
	125	315		
	160	400		
	200			
<b>14</b>	100	400	22	7
	125	500		
	160	630		
	200	800		
	250	1000		
	315			
<b>16</b>	100	400	22	7
	125	500		
	160	630		
	200	800		
	250	1000		
	315			
<b>18</b>	100	315	24	7
	125	400		
	160	500		
	200	630		
<b>20</b>	100	250	26	8
	125	400		
	160	500		
	200	630		
	250	800		
<b>25</b>	100	400	32	10
	160	500		
	200	630		
	250	800		
	315	1000		
	400			